


CORE PROTECTION SENSOR INSTALLATION

Revision History				
#	Description	Revised by	ECN#	Date
0	Released to Website	0	1226	8/2/07
1	Detail Installation	EG	1396	6/16/08

- NOTES: One Sensor per Riser
 : Multiple Sensors Wired in Parallel
 : Wire Both Black Wires to One Lead, Both White Wires to Second Lead
 : Sensor may be installed on inside or outside of quickseal. When installed in riser, install as shown for sensor access from hood.
 When installed in duct, install on opposite side of quickseal, or as shown with access door for cleanability.

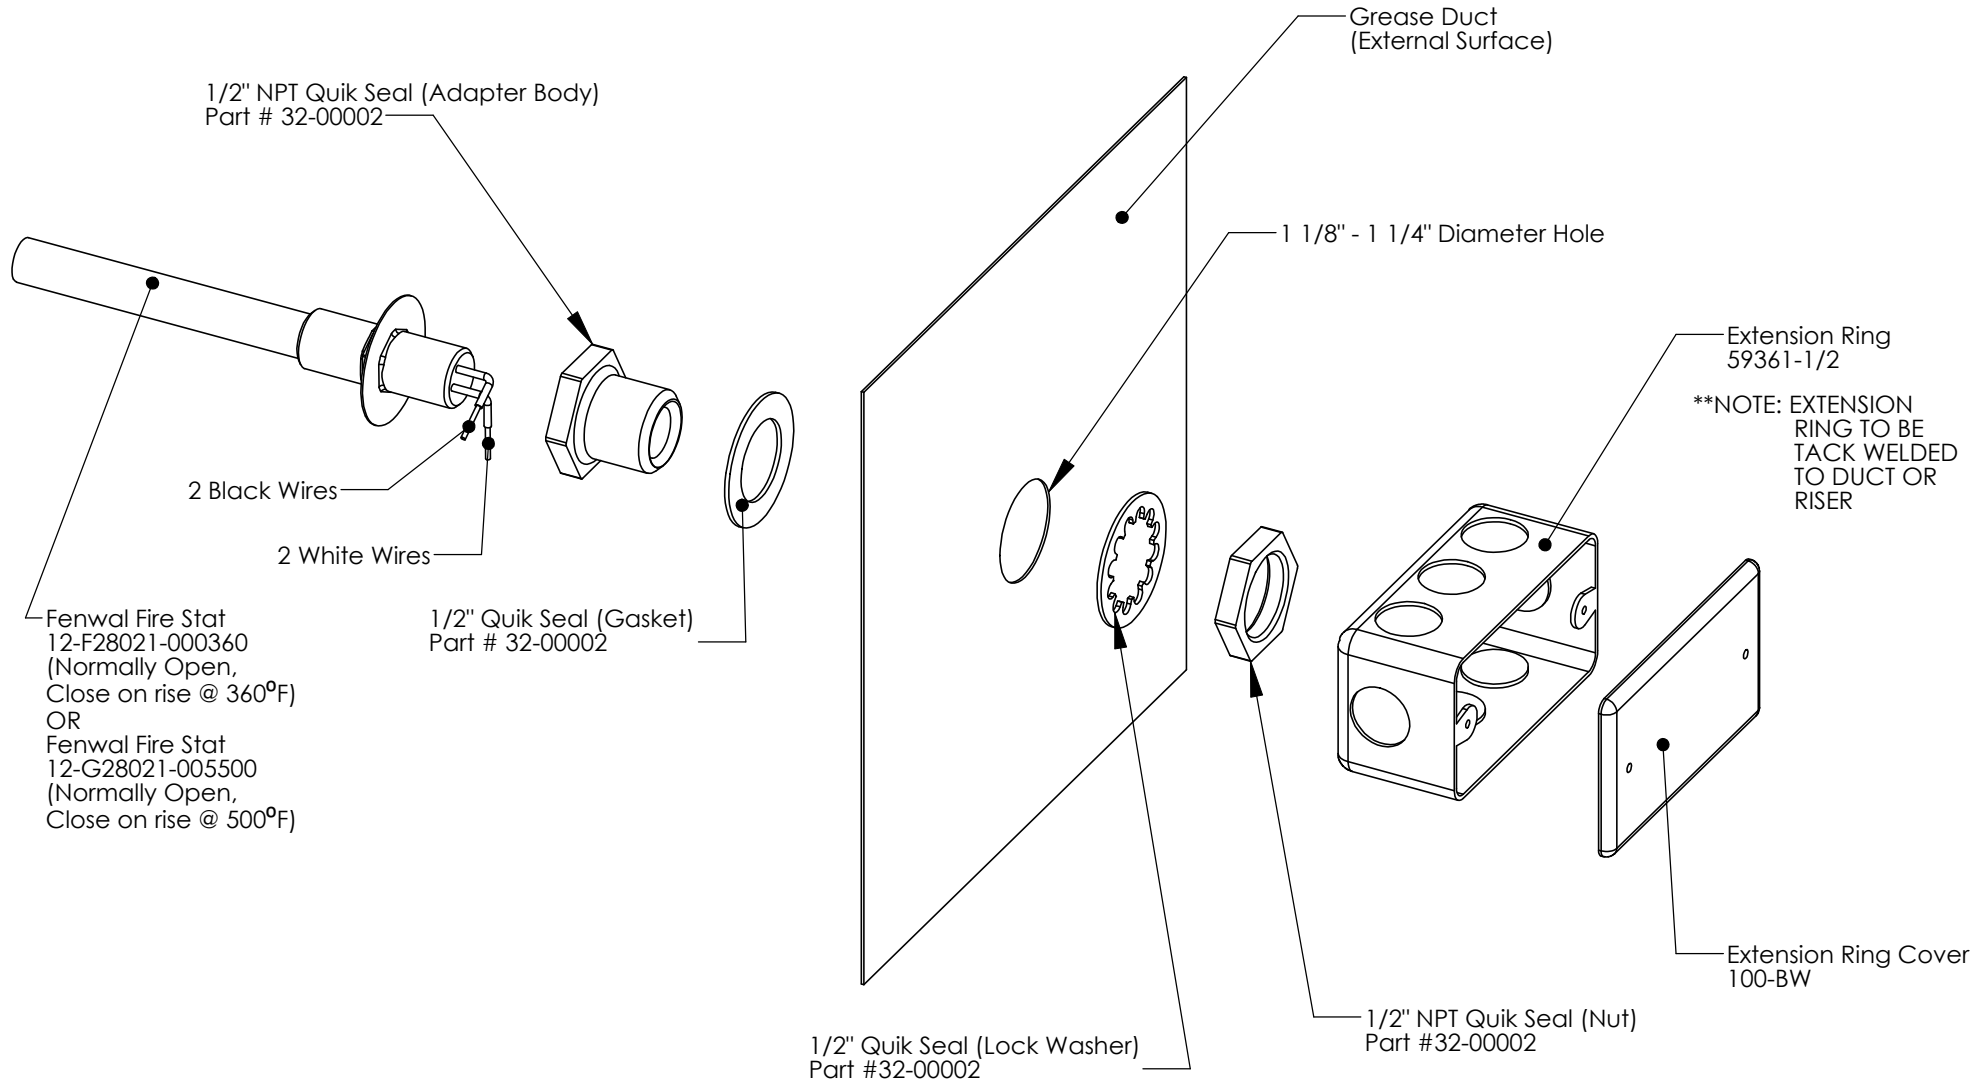

Material: N/A
 Blank Size: N/A x N/A
 Weight: N/A lbs

Part Number: N/A
 MACOLA Number: N/A
 Drawing Name: Sensor Install
 Drawn By: EG
 Parent Assembly: Core Sensor
 Sheet: 6 of 6

Unless Otherwise Specified
 Dimensions are in Inches.
 Standard Tolerances are:
 Fractions: ±1/16
 Decimal: .XX±.05
 .XXX±.015
 Angles: ±1°

CONFIDENTIAL