



H2013-.060 x 1-1/2" x 5-3/8" x .156
.140 dia. holes on 1-3/16 centers

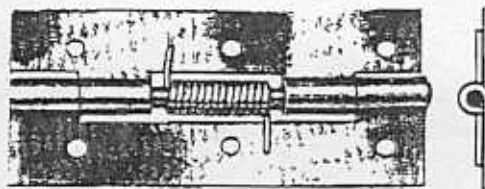


H2013-A-.060 x 1-1/2" x 3-1/4" x .156
.140 dia. holes on 1-3/16 centers

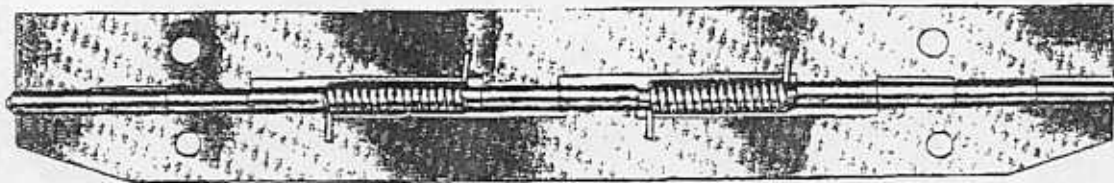

H2014-.050 x 1-1/2" x 8-3/4" x .093
.250 dia. holes in top leaf and .203 dia. holes in leaf with trim. Holes at 6" centers.

STEEL SPRING HINGES

TO ORDER WITHOUT HOLES DROP THE "H" PREFIX.

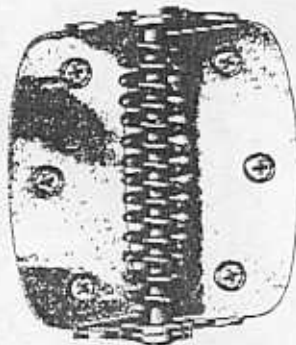

- Steel, plated, highly rust resistant
- Use for flush surface application
- Spring action for self-closing doors
- For use on cabinet doors, utility closet doors, office gates.

CABINET SPRING HINGE

Size, Length of Joint (Inches)	Width Open (Inches)	Quantity and Size of Wood Screws Per Pair
2	1 3/4	12 — 1/4x6 pan head

343
Steel — Bright brass or
bright nickel plated with
screws

ADJUSTABLE TENSION SCREEN DOOR SPRING HINGES



2152
Half surface



2154
Full surface

PART NUMBER	JOINT LENGTH	FRAME LEAF WIDTH	PART NUMBER	SIZE LENGTH X WIDTH
SP-2152	2-3/4"	1-9/16"	SP-2154	2-3/4" X 2-15/16"

Available: Grey Primecoat
Zinc Plated
Satin Brass Tone

Available: Zinc Plated
Satin Brass Tone

You must specify desired finish when ordering.

Designs and Specifications are for reference only and are subject to change without notice.

- For use to provide a strong closing action on light to medium weight wood screen doors
- 2152 for use in half surface applications — use 2154 in full surface installations
- Spring tension is fully adjustable
- Non-removable fast spun pin design
- Can be used in either right hand or left hand applications
- Hinges supplied complete with adjusting rod and stop pins

MOORE INDUSTRIAL HARDWARE

CINCINNATI • ATLANTA

E-MAIL Sales@MooreIndHardware.com • FAX 1-888-MIH-FAXD

PHONE 1-888-MOORE-10 (1-888-666-7344)



JAN 19 '01 11:12AM MOORE IND HW 513 870 9721