




# SINGLE WALL DUCT CHASEWAY SUPPORT

VERTICAL SUPPORT SPACING FOR DOUBLE WALL WITH FLOOR SUPPORT

DUCT DIAMETER	PLATE DIMENSIONS		SUPPORT SPACING	CHASE SUPPORT ASSEMBLY
	A	B		
8.00"	16.25"	16.25"	24'	DW08CHASESUPASY
10.00"	18.25"	18.25"	24'	DW10CHASESUPASY
12.00"	20.25"	20.25"	24'	DW12CHASESUPASY
14.00"	22.25"	22.25"	24'	DW14CHASESUPASY
16.00"	24.25"	24.25"	24'	DW16CHASESUPASY
18.00"	26.25"	26.25"	24'	DW18CHASESUPASY
20.00"	28.25"	28.25"	24'	DW20CHASESUPASY
22.00"	30.25"	30.25"	24'	DW22CHASESUPASY
24.00"	32.35"	32.35"	24'	DW24CHASESUPASY
30.00"	38.25"	38.25"	24'	DW30CHASESUPASY
36.00"	44.25"	44.25"	24'	DW36CHASESUPASY

INSTALLATION FASTENER TYPES

	Wood (SG = 0.42 Min.)	Concrete (2500 psi Min. Cracked Concrete)
Fastener	3/8" Dia. Zinc Plated Lag Bolt	3/8" Dia. SS Hilti Kwik Bolt TZ Expansion Anchor
Minimum Thread Penetration	2"	2-5/16"
Minimum Edge Distance	1-1/2"	3"

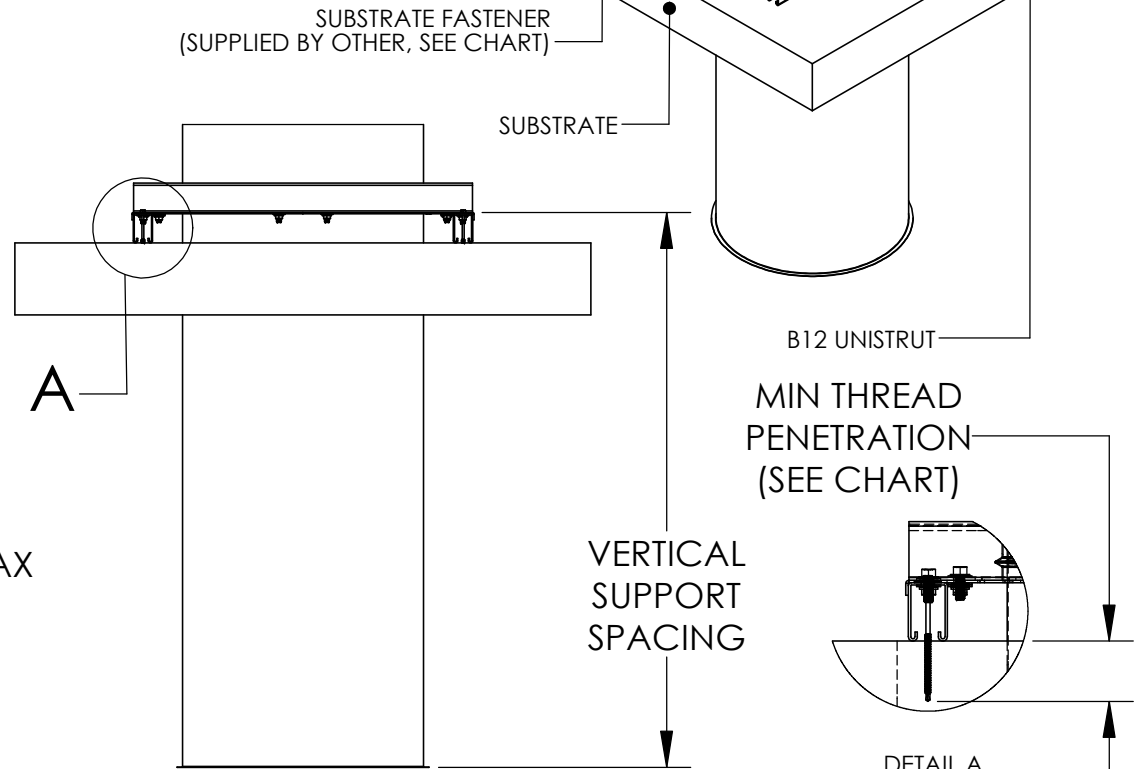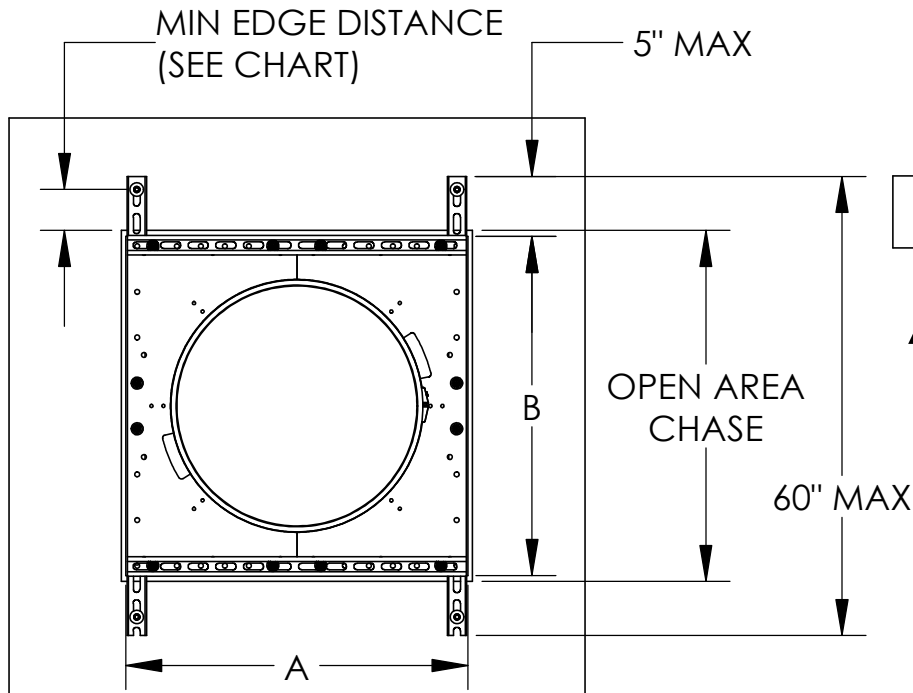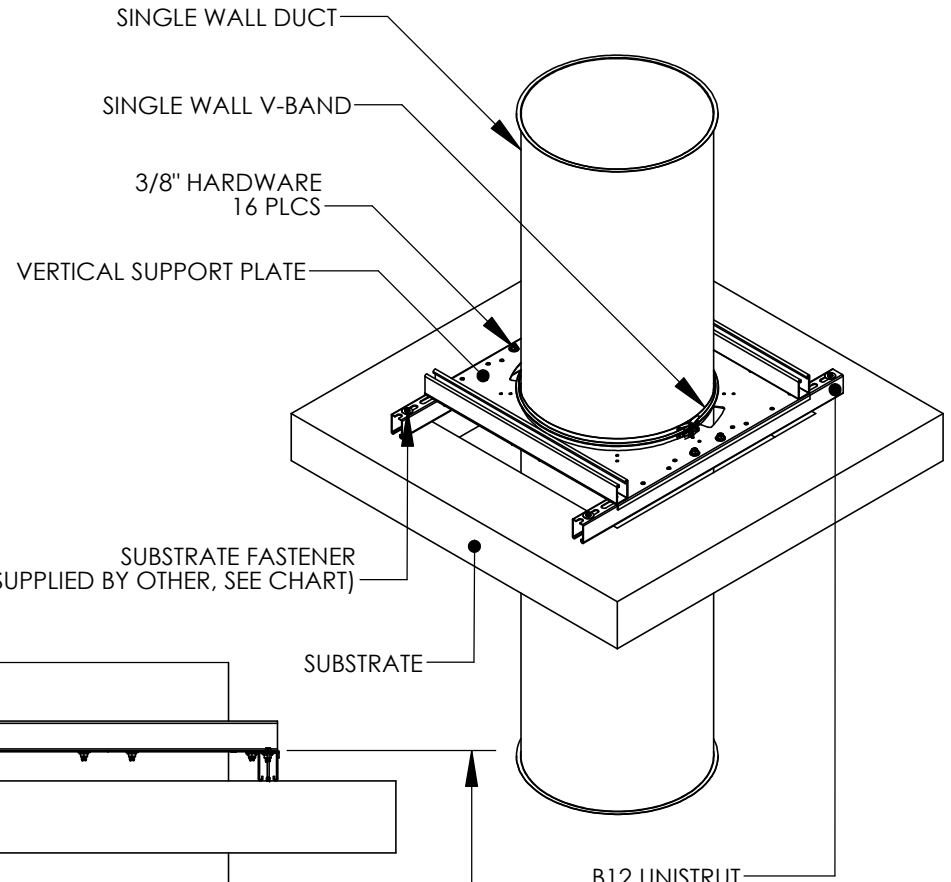

DETAIL A  
SCALE 1 : 8